

- ### BUS SHELTER NOTES
1. CLASSIC SHELTER TO BE INSTALLED
  2. TACTILES POSITIONED IN ACCORDANCE WITH AS/NZS 1428.4.1. TO ADHERE WITH DDA COMPLIANCE
  3. REFER WHEELCHAIR ROTATION SPACE ON DRAWING # DDA DRAWING 002
  4. KERB HEIGHT 150MM
  5. LONGITUDINAL FALL MORE THAN 2.5%
  6. DIRECTIONAL FALL MORE THAN 2.5%
  7. EXCAVATE AND POUR CONCRETE TO SURROUNDING AREAS TO HAVE A SMOOTH TRANSITION.
  8. REINSTATE ALL DISTURBED AREAS TO MATCH EXISTING.

### PRINCIPAL CONTRACTOR NOTIFICATION

THE CONSTRUCTION WORK DEPICTED ON THESE PLANS HAVE BEEN ASSESSED AS HIGH RISK IN ACCORDANCE WITH WORK HEALTH AND SAFETY REGULATION 2011(WHS REG 2011) CHAPTER 6 CONSTRUCTION WORK (clause 291).

AS SUCH IT IS THE PRINCIPAL CONTRACTORS RESPONSIBILITY AS PER WHS REG 2011 CHAPTER 6 CONSTRUCTION WORK TO;

- \* ERRECT SIGNAGE IDENTIFYING THEMSELVES AS PRINCIPAL CONTRACTOR.
- \* ENSURE OH&S INDUCTION TRAINING IS TO BE UNDERTAKEN BY EMPLOYEES, AGENTS AND SUBCONTRACTORS ENTERING THE WORK SITE.
- \* PREPARE, IMPLEMENT, UPDATE AND MAKE AVAILABLE SAFE WORK METHOD STATEMENTS AND WHS MANAGEMENT PLANS.
- \* ENSURE THAT EACH SUBCONTRACTOR PROVIDES WRITTEN SAFE WORK METHOD STATEMENTS BEFORE COMMENCING WORK
- \* DIRECT AND MONITOR COMPLIANCE WITH APPLICABLE LEGISLATION AND ANY SAFE WORK METHOD STATEMENTS OR PROCEDURES
- \* KEEP A REGISTER OF, AND OTHER RECORDS IN RELATION TO, ALL HAZARDOUS AND OTHER SUBSTANCES ON SITE.
- \* COMMUNICATE TO THE COUNCIL OFFICER SUPERVISING THE CONTRACT ANY MAJOR ISSUES AS THEY ARISE, INCLUDING WORKCOVER NOTIFIABLE EVENTS

NO WORK IS TO COMMENCE UNTIL A SITE SPECIFIC INDUCTION IS CARRIED OUT WITH THE COUNCIL OFFICER SUPERVISING THE CONTRACT.

PRINCIPAL CONTRACTOR AND ALL SUBCONTRACTORS ARE TO ADHERE TO THE RESPONSIBILITIES AND REQUIREMENTS SET OUT IN KOGARAH CITY COUNCILS CONTRACTOR SAFETY INDUCTION HANDBOOK


### GENERAL NOTES

1. THESE DRAWINGS SHALL BE READ IN CONJUNCTION WITH ALL OTHER SPECIFICATIONS AND WITH SUCH OTHER WRITTEN INSTRUCTIONS THAT MAY BE ISSUED DURING THE COURSE OF THE CONTRACT. ANY DISCREPANCIES IN THESE DOCUMENTS SHALL BE REFERRED TO THE SUPERINTENDENT FOR A DECISION BEFORE PROCEEDING WITH THE WORK.
2. PROVIDE ADEQUATE APPROACH WARNING SIGNS DURING AFTER CONSTRUCTION ACCORDING TO A.S.1742.3.
3. ALL SERVICES AFFECTED BY NEW WORK ARE TO BE ADJUSTED TO SUIT IN FIELD OR AS DIRECTED BY THE SUPERVISING AUTHORITY. ALL SERVICES TO BE CHECKED FOR LEVEL AND LOCATION PRIOR TO COMMENCEMENT OF WORK.
4. THE CONTRACTOR SHALL CHECK AND BE RESPONSIBLE FOR THE CORRECTNESS OF ALL DIMENSIONS AND ANY DISCREPANCY SHALL BE REPORTED IMMEDIATELY TO THE SUPERINTENDENT. DIMENSIONS SHALL NOT BE OBTAINED BY SCALING FROM THE DRAWINGS.
5. STABILITY OF THE EXCAVATIONS DURING CONSTRUCTION SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. NO PART OF ANY EXISTING STRUCTURE OR SERVICE SHALL BE OVER STRESSED. APPROVAL OF ALL PROPOSALS MUST BE GRANTED BY THE SUPERINTENDENT PRIOR TO THE COMMENCEMENT OF WORK.
6. ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF THE CURRENT SAA CODES AND ORDINANCES OF THE RELEVANT BUILDING AUTHORITY AND THE SPECIFICATIONS.
7. ALL OPEN EXCAVATIONS ARE TO BE SEALED OFF TO PUBLIC ACCESS BY THE PROVISION OF APPROPRIATE SAFETY FENCING TO THE SATISFACTION OF THE PROJECT MANAGER.
8. ALL FILLING SO PROVIDED AND IMPORTED ONTO SITE SHALL BE TO THE SATISFACTION OF THE SUPERVISING ENGINEER.
9. MATERIAL USED FOR FILLING SHALL BE UNIFORM IN CLASSIFICATION TO AVOID UNEVEN COMPACTION AND SETTLEMENT.
10. FILL MATERIAL SHALL BE SPREAD AND ROLLED TO PROVIDE COMPACTION LAYERS NOT GREATER THAN 150mm IN THICKNESS AND 98% STANDARD.
11. ALL VEGETABLE MATTER SHALL BE REMOVED BEFORE PLACING FILLING
12. ALL DISTURBED AREAS TO BE GRADED TO AVOID PONDING AND TURFED.
13. NO CHANGES SHALL BE MADE WITHOUT WRITTEN CONSENT OF THE SUPERINTENDANT.

### SITE PREPARATION

1. REMOVE ALL GRASS, TOPSOIL, EXISTING CONCRETE SLABS, DISCONNECT SERVICE LINES, RUBBISH OR ANY OTHER DELETERIOUS MATERIAL FROM THE PROPOSED WORK SITE. WORK ONLY IN THE DESIGNATED CONSTRUCTION ZONE AS INDICATED ON THE DRAWINGS.
2. EXISTING SERVICES ARE TO BE MAINTAINED OR RELOCATED REFER ANY CONFLICTS TO THE SUPERINTENDENT. IF UNIDENTIFIED EXISTING SERVICES ARE ENCOUNTERED NOTIFY SUPERINTENDENT IMMEDIATELY.
3. REFER TO THE DRAWINGS FOR SURVEY SETOUT DETAILS. ALL PROPOSED PITS AND DRAINAGE STRUCTURES ARE TO BE LOCATED BY CHAINAGE AND OFFSET FROM THE PEGLINE PROVIDED. IT IS THE CONTRACTORS RESPONSIBILITY TO ENSURE THAT ALL SURVEY CONTROL MARKS BE MAINTAINED.
4. EROSION AND SEDIMENTATION CONTROL MEASURES SHALL BE INSTALLED IN ACCORDANCE WITH THE SOIL AND CONSERVATION DEPARTMENT OF N.S.W. GUIDELINES AND MAINTAINED FOR THE DURATION OF THE WORKS.
5. LOCATE ALL HOUSE SERVICE CONNECTIONS PRIOR TO COMMENCEMENT

### PAVEMENT DETAILS

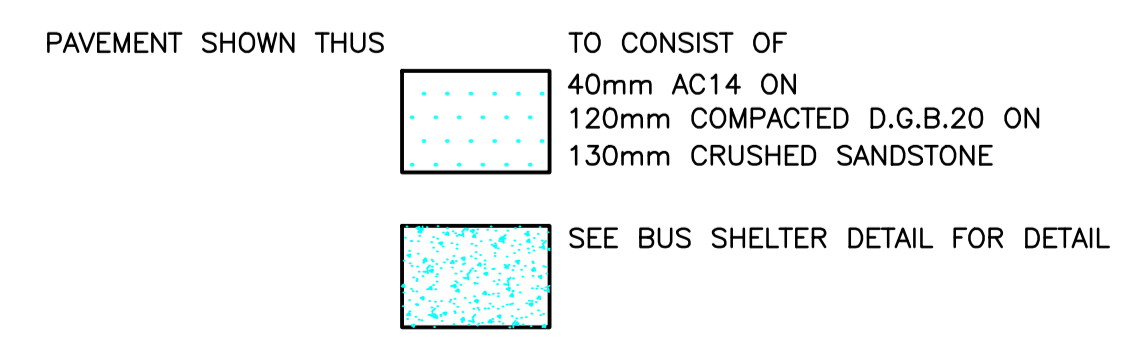

REVISION DETAILS		APPROVED	DATE
<b>BUS BAY CONSTRUCTION</b>			
FOREST ROAD AND TATE PLACE			
LURGARNO			
		CAUTION BEFORE EXCAVATION FOR LEGAL REASONS ALL SERVICE PLANS MUST BE ON SITE AT ALL TIMES DURING CONSTRUCTION. OBTAIN UPDATED SERVICE PLANS PRIOR TO COMMENCEMENT CALL "DIAL BEFORE YOU DIG" 1100 SERVICE PLANS DATED 6/3/19	
		SURVEYED	BM DEC18
		DESIGNED	AK FEB19
		CHECKED	
		APPROVED	
SEQUENCE No.	TRIM No.	DATUM	SCALE AT A1 SCALE AT A3
80891482		A.H.D.	1 : 200 1 : 400
FILE No.	DRG. No.	SHT 1 OF 1	REV.
	U761		